


# SUPPRESSION

## Fire Extinguisher

- Fire extinguisher consists of a fast opening valve and a pressure gauge that is attached to a DOT/TPED certified cylinder
- The bracket assembly is mounted to the vehicle and securely holds the extinguisher
- Bottle contains innovative Purple-K
- 2 Mounting Types

◇ Vertical

◇ Horizontal

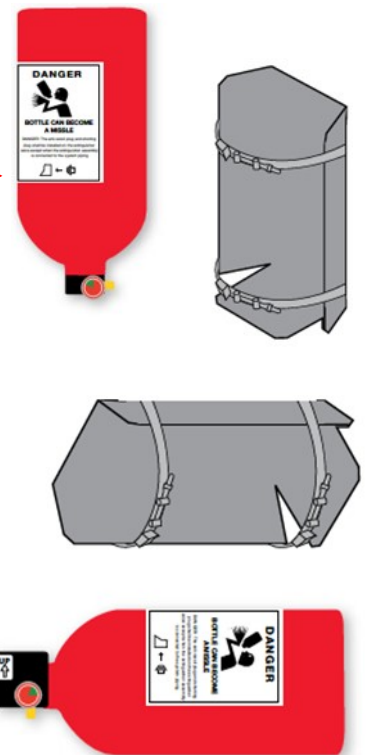

- Different gauge locations available depending on mounting configuration



X = 1  
(LEFT)



X = 2  
(RIGHT)



X = 3  
(BACK)

This presentation contains no technical data subject to the EAR or ITAR