


Global Common Platform

Remote Mounted with Separate Driver Interface

- Operational 9 to 32VDC
- Very flexible unit—standard features
 - ◇ Fire, Gas, Fire & Gas
 - ◇ Uses standard sensors
 - ◇ Remote mountable
 - ◇ Integrate into OEM chassis dash
- Options
 - ◇ Independently monitor up to 12 channels
 - ◇ Date/time stamp any event/fault
 - ◇ J1939 compliant, interface with other technologies
 - ◇ CAN communications
 - ◇ Channel naming
 - ◇ Delay timing
 - ◇ Single or dual extinguisher activation

Controller

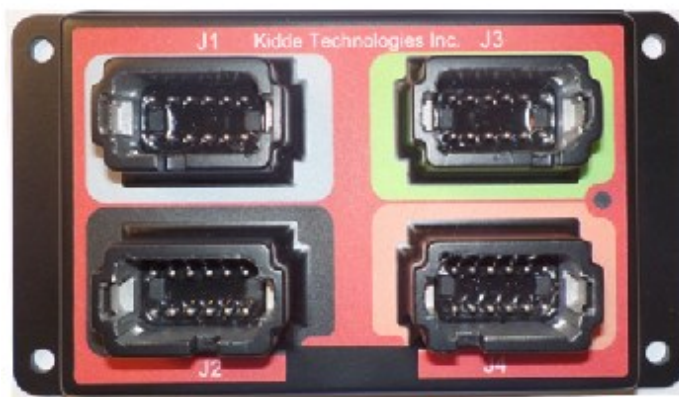

This presentation contains no technical data subject to the EAR or ITAR