

ASSEMBLY

HYDRANT RISER 100mm DUAL

PRODUCT CODE: #ADHR100C



APPROVALS

Pipe: AS 1074 hot dipped gal
Hydrant valves: AS 2419.2
Couplings: UL/FM listed

WORKING PRESSURE

Couplings: 2068 kPa
Hydrant valve: 1850 kPa

MATERIAL

Hydrant riser: Hot dipped gal
Hydrant valve: Brass
Couplings: Galvanised

INSTALLATION

Connect to service 100mm above finished ground level with copper x roll groove adaptor or flange (either supplied)

BRIGADE CONNECTIONS


All Australian fire authorities available

RISER DIMENSIONS

800mm to hydrant handwheel centre from centre of bottom coupling

OPTIONS AVAILABLE

Roll groove connection on riser
Flanged (E) connection on riser
Varying riser heights fabricated to order

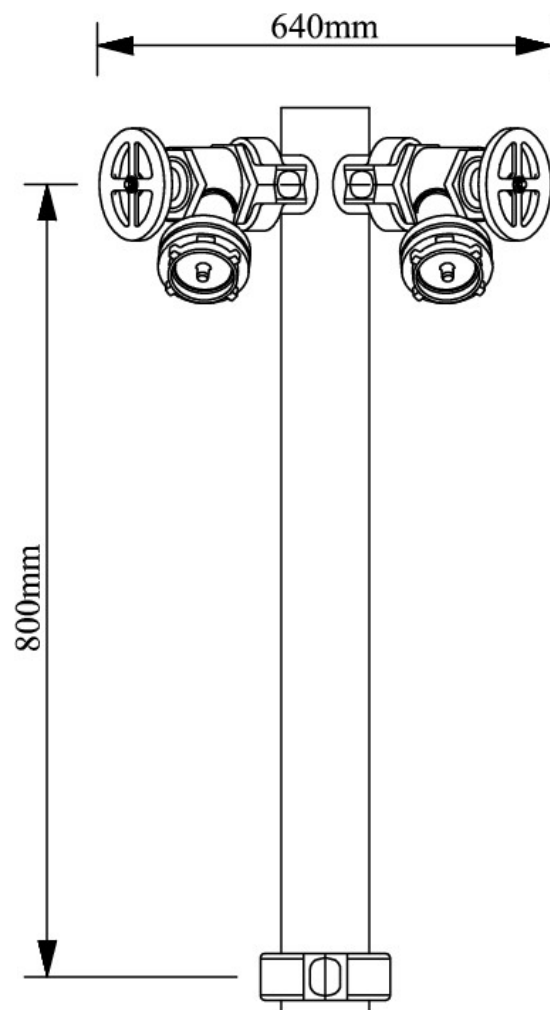

All measurements are a guide only - for accurate measurements please contact KlineFire