

ASSEMBLY

HYDRANT RISER 150mm DUAL

PRODUCT CODE: #ADHR150C



APPROVALS

Pipe: AS 1074 hot dipped gal

Hydrant valves: AS 2419.2

Couplings: UL/FM listed

WORKING PRESSURE

Couplings: 2068 kPa

Hydrant valve: 1850 kPa

MATERIAL

Hydrant riser: Hot dipped gal

Hydrant valve: Brass

Couplings: Galvanised

INSTALLATION

Connect to service 150mm above finished ground level with copper x roll groove adaptor or flange (either supplied)

BRIGADE CONNECTIONS

All Australian fire authorities available

RISER DIMENSIONS


850mm to hydrant handwheel centre from centre of bottom coupling

OPTIONS AVAILABLE

Roll groove connection on riser

Flanged (E) connection on riser

Varying riser heights fabricated to order

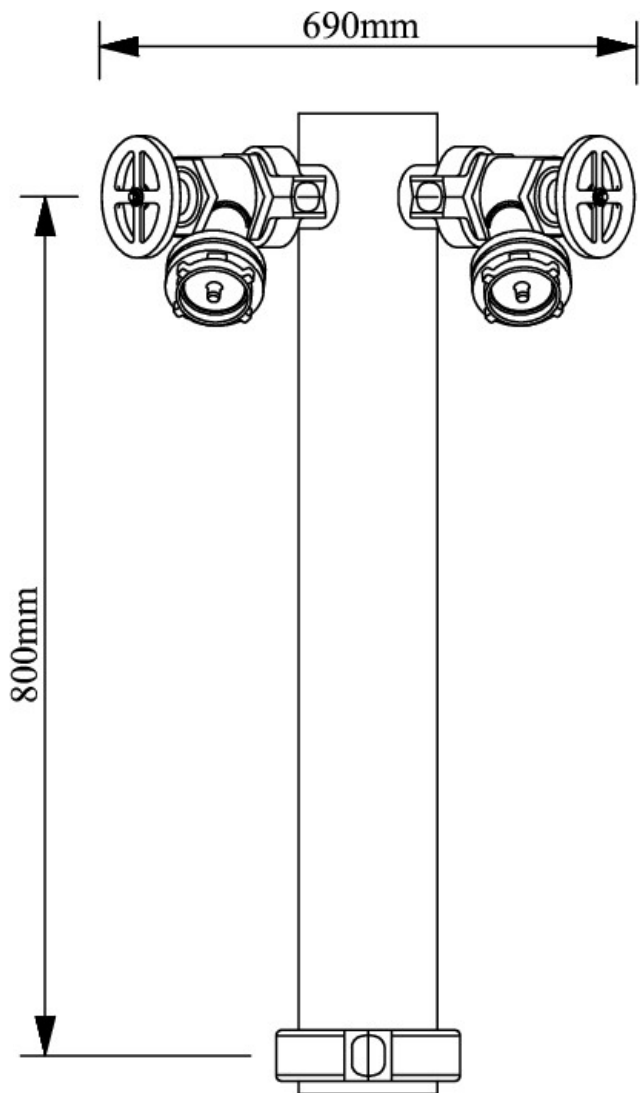

All measurements are a guide only - for accurate measurements please contact KlineFire