

ASSEMBLY

HYDRANT RISER 100mm DUAL
PRODUCT CODE: ADHR100CX



APPROVALS

Pipe: AS 1074 hot dipped gal
Hydrant valves: AS 2419.2
Couplings: UL/FM listed

WORKING PRESSURE

Couplings: 2068 kPa
Hydrant valve: 1850 kPa
Pipe: 5100 kPa

MATERIAL

Bull head tee: Galvanised
Hydrant valve: Brass
Couplings: Galvanised

INSTALLATION

Connect to service 100mm above finished ground level with copper x roll groove adaptor or flange (either supplied)

BRIGADE CONNECTIONS


All Australian fire authorities available

RISER DIMENSIONS

800mm from centre of hydrant handwheel to centre of bottom coupling

OPTIONS AVAILABLE

Roll groove connection on riser
Flanged (E) connection on riser
Varying riser heights fabricated to order

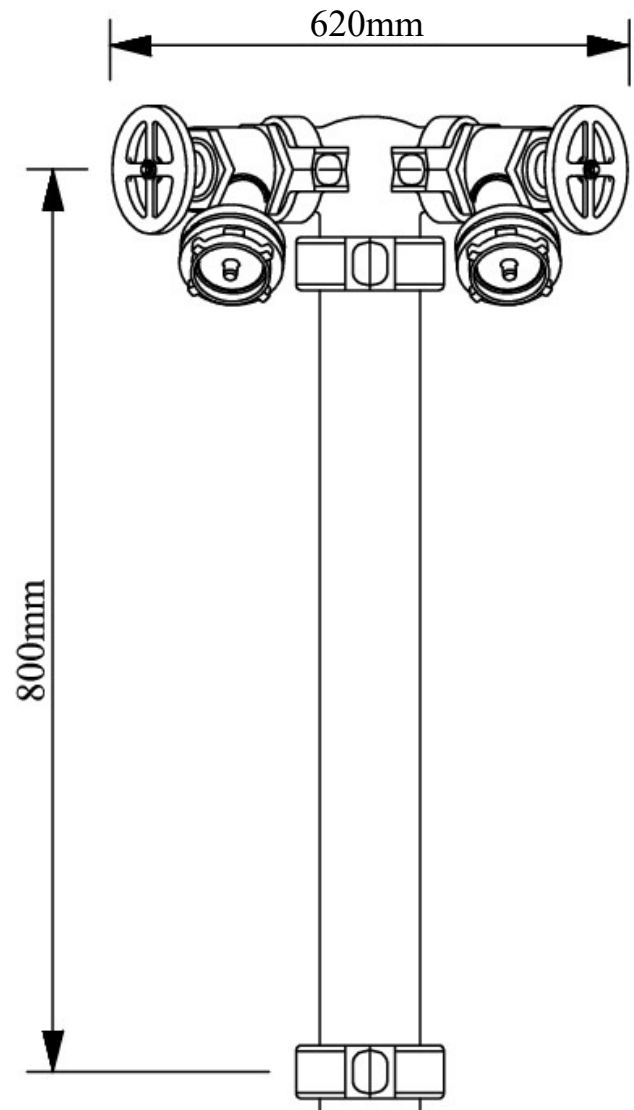

Sizes may vary due to supply of product, contact office to confirm