



## Linear Thermal Detector (LTD)

- A set temperature detector
- Twin conductor, fusible cable with temperature sensitive insulation protected by an outer sheath
- The minimum bend radius of 3"
- Requires replacement after activation
- Operating temperature of 105°C and an alarm temperature of 176°C

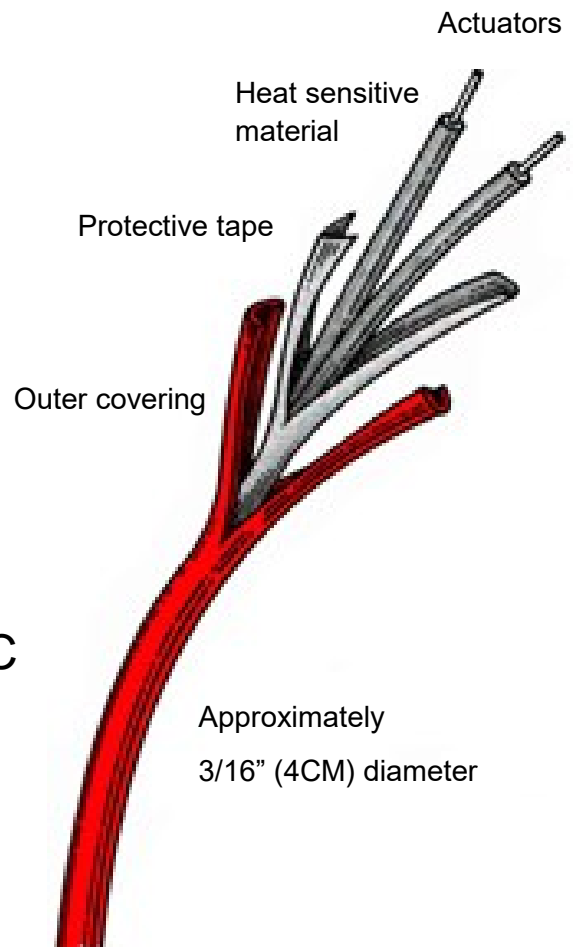

**Routed so it targets hazards such as:**

- ◇ Fuel rail
- ◇ Alternator
- ◇ Electrical hub
- ◇ Starter

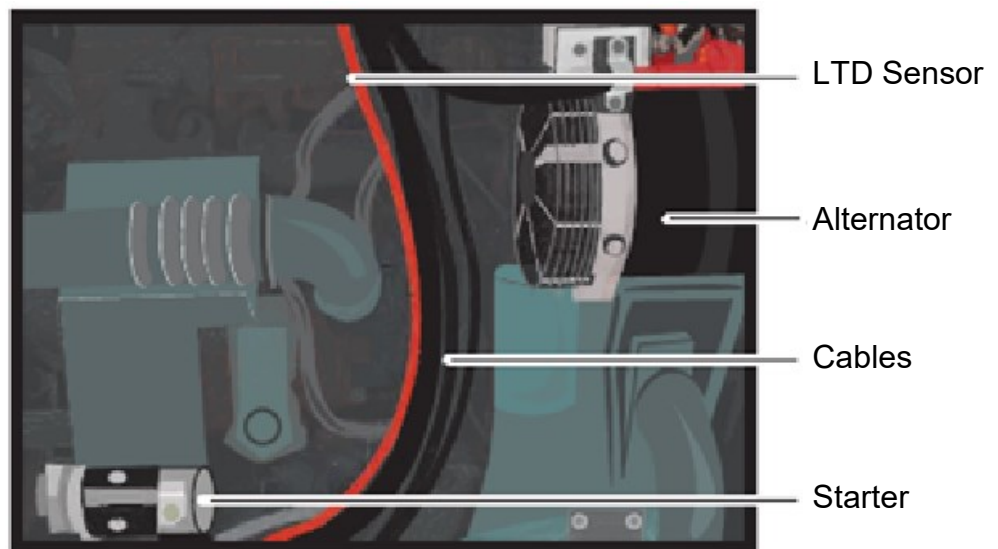

This presentation contains no technical data subject to the EAR or ITAR